「人工」で成



Plastic Waterproof Connector-FDDI Optical
Fiber Series

- The ergonomic structure is designed for the rigorous testing environment.
- Rich in structure, the products are widely used in LED screen, lighting, audio-visual equipment, medical equipment, detection and measurement equipment,

 communication industry, telecommunications equipment and other fields,Can meet a variety of customized requirements.

 PBT material housing , stable electrical performance , high strength pressure resistance , high temperature resistance , anti explosion ,

 corrosion resistance and effectively respond to environment changes


Mechanical parameter

Shell material :	High performance engineering plastics/Metal+Plastic
Flame retardant grade :	UL94-V0
Termination :	Welding/Crimping/Quick plug connect
Waterproof level:	IP67 , IP68
Insertion loss :	≤0.2dB
Return Loss :	≥50dB
Applicable temperature :	-25℃ ~ +85℃
Baud rate :	≈20000000Mbit/s





Dimension

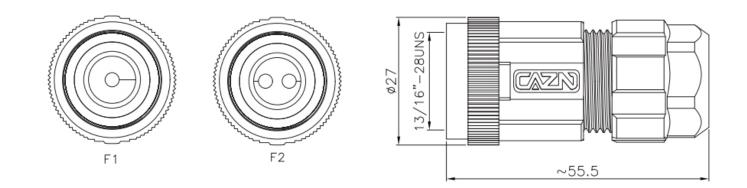

Ordering products

Product Name	Tail fastener	P/N	3D Download	2D Download
FDDI Single-mode Plastic Plug(Threaded)	F1:Single-mode Single-core	E13T-MF1-PRA-NR		Ť
FDDI Single-mode Plastic Plug(Threaded)	F2:Single-mode Double-core	E13T-MF2-PRA-NR		Ŧ

Data Download

Product Catalog	CAZN-Plastic waterproof connector series
REACH233	REACH233Report
RoHS	Certificate, Report
Waterproof test report	Certificate、Report