


- Plastic Waterproof Connector-FDDI Optical Fiber Series
- The ergonomic structure is designed for the rigorous testing environment.
- Rich in structure, the products are widely used in LED screen, lighting, audio-visual equipment, medical equipment, detection and measurement equipment,
- communication industry, telecommunications equipment and other fields,Can meet a variety of customized requirements.
- PBT material housing , stable electrical performance , high strength pressure resistance , high temperature resistance , anti - explosion ,
- corrosion resistance and effectively respond to environment changes

Mechanical parameter

Shell material :	High performance engineering plastics/Metal+Plastic
Flame retardant grade :	UL94-V0
Termination :	Welding/Crimping/Quick plug connect
Waterproof level:	IP67 , IP68
Insertion loss :	≤0.2dB
Return Loss :	≥50dB
Applicable temperature :	-25℃ ~ +85℃
Baud rate :	≈200000000Mbit/s

Dimension

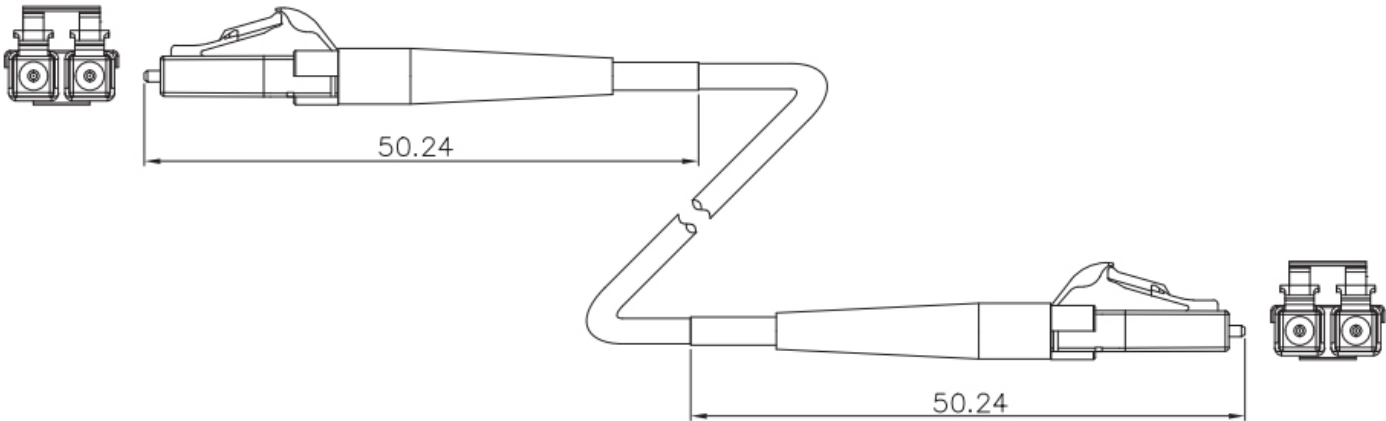

Ordering products

Product Name	Tail fastener	Wire	P/N	3D Download	2D Download
SC Single-mode Single-core Optical fiber Cable-xxM	F1: Single-mode Single-core	PVC	FDDI-SCF1-NRA/NRA-xxPV		
SC Single-mode Single-core Optical fiber Cable-xxM	F1: Single-mode Single-core	PU	FDDI-SCF1-NRA/NRA-xxPU		
LC Single-mode Double-core Optical fiber Cable-xxM	F2:Single-mode Double-core	PVC	FDDI-LCF2-NRA/NRA-xxPV		
LC Single-mode Double-core Optical fiber Cable-xxM	F2:Single-mode Double-core	PU	FDDI-LCF2-NRA/NRA-xxPU		

\*If need to order other collocation or wire, please consult customer service.

Data Download

Product Catalog	<a href="#">CAZN-Plastic waterproof connector series</a>
REACH233	<a href="#">REACH233Report</a>
RoHS	<a href="#">Certificate</a> 、 <a href="#">Report</a>
Waterproof test report	<a href="#">Certificate</a> 、 <a href="#">Report</a>