


- Non-latching, key (G) or Key(A...M), cable collet



TECHNICAL PARAMETER

Durability :	>5000 Cycles
Humidity :	Up to 95% at 60°C/140°F
Operating temperature :	-55°C ~ +200°C
Anti-vibration performance :	10-2000 Hz,15g
Impact resistance :	100g,6ms
Salt spray corrosion test :	>1000 h
Protection level :	IP50
Environment test :	55/175/21
Shielding performance :	>95dB (10MHz); >80dB (1GHz)

DIMENSION

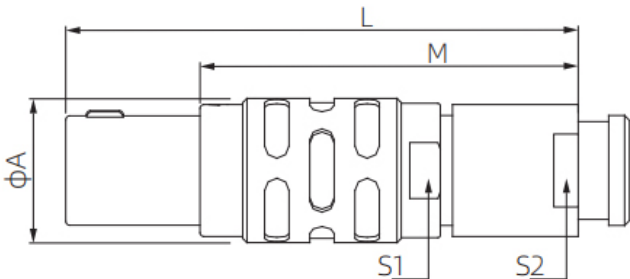

编号(Model)		尺寸(Size)					适配电缆夹(Adapted collet)	
型号(Type)	系列(Series)	A	L	M	S1	S2	最小(Min.)	最大(Max.)
TFG	0B	9.5	36.0	26.0	8.0	7.0	3.2	5.2
TFG	1B	12.0	43.0	32.0	10.0	9.0	4.2	7.2
TFG	2B	15.0	50.0	38.0	13.0	12.0	5.2	10.2
TFG	3B	18.0	58.0	43.0	15.0	14.0	5.2	14.2

Ordering products

Plug:

TG

G

.

1B

.

306

.

C

L

A

D

.

52

Variant

Alignment key

G A B C

D E F J

K L M Y

Series number

00

0B

1B

2B

3B

Insert configuration

302 303 304 305 306

302 303 304 305 306 307 309 312

302 303 304 305 306 307 308 310 314 316

302 303 304 305 306 307 308 310 312 314 316 318 319 326 332 514

302 303 304 305 306 307 308 309 310 312 314 316 318 320 322 324 326 330 332

Contact

A: Male

L: Female

Cable diameter ϕ

00:2.2~3.2

0B:3.2~5.2

1B:4.2~7.2

2B:5.2~10.2

3B:5.2~14.2

2D Download	
3D Download	

Data Download

Product Catalog	CAZN-Push Pull Series Brochure
-----------------	--