


- Non-latching, key (G) or keys (A...M and R), cable collet and lanyard release



TECHNICAL PARAMETER

Durability :	>5000 Cycles
Humidity :	Up to 95% at 60°C/140°F
Operating temperature :	-55°C ~ +200°C
Anti-vibration performance :	10-2000 Hz,15g
Impact resistance :	100g,6ms
Salt spray corrosion test :	>1000 h
Protection level :	IP50
Environment test :	55/175/21
Shielding performance :	>95dB (10MHz); >80dB (1GHz)

DIMENSION

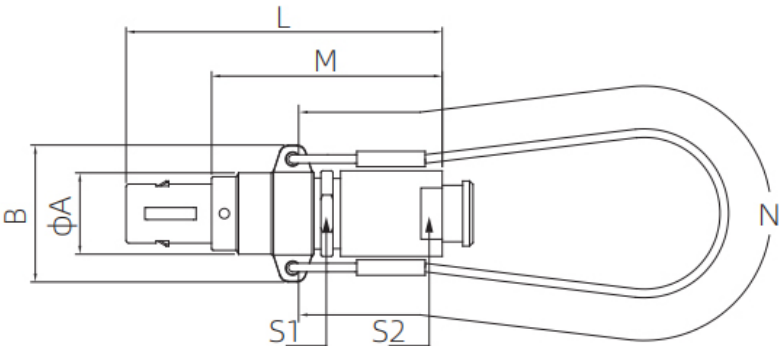

编号(Model)		尺寸(Size)							适配电缆夹(Adapted collet)	
型号(Type)	系列(Series)	A	B	L	M	N	S1	S2	最小(Min.)	最大(Max.)
TNG	0B	9.5	15.5	36.0	26.0	140.0	8.0	8.0	3.2	5.2
TNG	1B	12.0	18.0	43.0	32.0	140.0	10.0	9.0	4.2	7.2
TNG	2B	15.0	21.0	49.0	37.0	160.0	13.0	12.0	5.2	10.2
TNG	3B	18.0	25.0	58.0	43.0	190.0	15.0	14.0	5.2	14.2

Ordering products

Plug:

TG

G

1B

306

C

L

A

D

52

Variant

Alignment key

G A B C
D E F J
K L M Y

Series number

Insert configuration

00	302 303 304 305 306
0B	302 303 304 305 306 307 309 312
1B	302 303 304 305 306 307 308 310 314 316
2B	302 303 304 305 306 307 308 310 312 314 316 318 319 326 332 514
3B	302 303 304 305 306 307 308 309 310 312 314 316 318 320 322 324 326 330 332

Contact

A: Male
L: Female

Cable diameter φ

00:2.2~3.2
0B:3.2~5.2
1B:4.2~7.2
2B:5.2~10.2
3B:5.2~14.2

2D Download	↓
3D Download	

Data Download

Product Catalog	CAZN-Push Pull Series Brochure
-----------------	--