




- 欧标连接器 M16系列 ,
- 结构类型：直式塑胶组装插头 ,
- 插针类型：孔型 ,
- 芯数：2,3,4,5,6,7,8,12,14,16,19,24pin ,
- 连接方式：焊接 ,
- 屏蔽：是 ,
- 认证：CE RoHS ,
- 标准：IEC 61076-2-106-2012 AISG

机械参数

壳体材料：	黄铜/锌合金度镍/黄铜镀镍
胶芯材料：	PA66
密封材料：	环氧树脂/橡胶
插针材料：	黄铜/磷铜镀金
成型材料：	TPU/PVC
接线范围：	PG7:4~6mm; PG9:6~8mm
接触阻抗：	≤5 mΩ
插拔次数：	≥500 次
适用温度：	-25℃ ~ +80℃
防护等级：	IP65/IP67
执行标准：	IEC 61076-2-106-2012

尺寸图

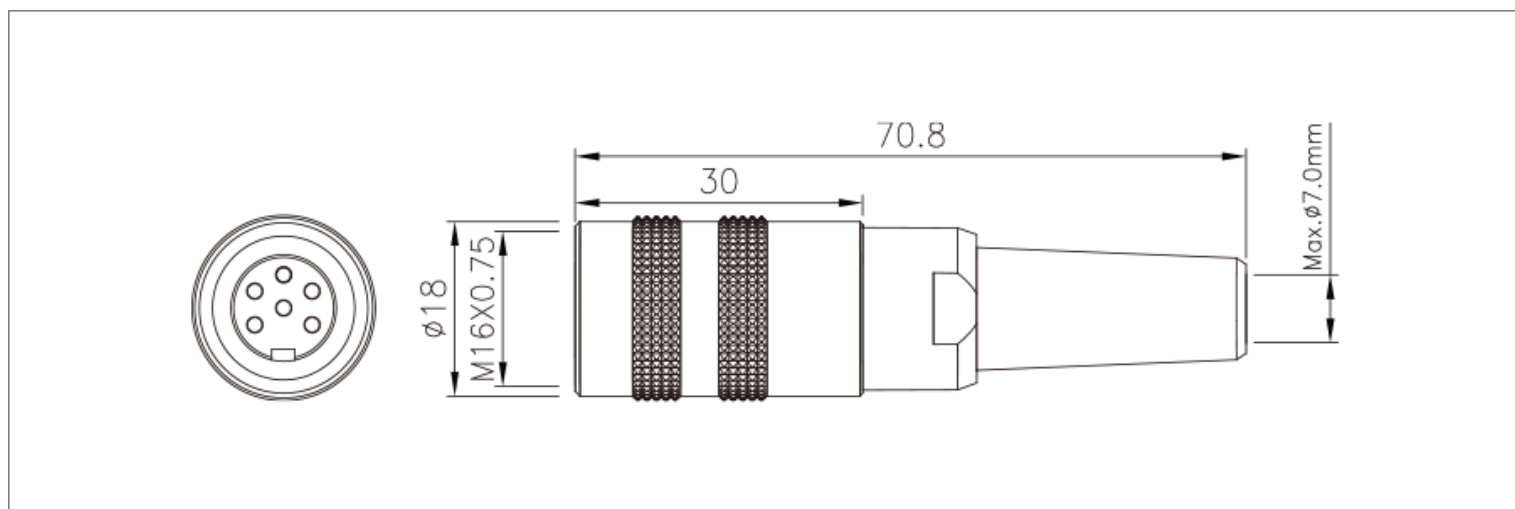

电气参数

芯数	针型		额定电流	额定电压		导体规格		孔型	
	常规编码	A型		A/C	D/C	AWG	mm²	常规编码	A型
2			7A	250V	32V	20	0.75		
3			7A	250V	32V	20	0.75		
4			6A	250V	32V	20	0.75		
5			6A	250V	32V	20	0.75		
6			5A	250V	32V	20	0.75		
7			5A	125V	32V	20	0.75		
8			5A	60V	32V	20	0.75		
12			3A	60V	32V	24	0.25		
14			3A	60V	32V	24	0.25		
16			3A	60V	32V	24	0.25		
19			3A	60V	32V	24	0.25		
24			1A	60V	32V	26	0.14		

订购产品

产品名称	产品型号（出线尺寸5.0）	产品型号（出线尺寸6.5）	芯数	3D下载	2D下载
------	---------------	---------------	----	------	------

M16直式孔型塑胶组装式插头-焊接式-尾管-2芯	M16-S2-PWA 6.5-PT	M16-S2-PWA 6.5-PT	2		
M16直式孔型塑胶组装式插头-焊接式-尾管-3芯	M16-S3-PWA 5.0-PT	M16-S3-PWA 6.5-PT	3		
M16直式孔型塑胶组装式插头-焊接式-尾管-4芯	M16-S4-PWA 5.0-PT	M16-S4-PWA 6.5-PT	4		
M16直式孔型塑胶组装式插头-焊接式-尾管-5芯	M16-S5-PWA 5.0-PT	M16-S5-PWA 6.5-PT	5		
M16直式孔型塑胶组装式插头-焊接式-尾管-6芯	M16-S6-PWA 5.0-PT	M16-S6-PWA 6.5-PT	6		
M16直式孔型塑胶组装式插头-焊接式-尾管-7芯	M16-S7-PWA 5.0-PT	M16-S7-PWA 6.5-PT	7		
M16直式孔型塑胶组装式插头-焊接式-尾管-8芯	M16-S8-PWA 5.0-PT	M16-S8-PWA 6.5-PT	8		
M16直式孔型塑胶组装式插头-焊接式-尾管-12芯	M16-S12-PWA 5.0-PT	M16-S12-PWA 6.5-PT	12		
M16直式孔型塑胶组装式插头-焊接式-尾管-14芯	M16-S14-PWA 5.0-PT	M16-S14-PWA 6.5-PT	14		
M16直式孔型塑胶组装式插头-焊接式-尾管-16芯	M16-S16-PWA 5.0-PT	M16-S16-PWA 6.5-PT	16		
M16直式孔型塑胶组装式插头-焊接式-尾管-19芯	M16-S19-PWA 5.0-PT	M16-S19-PWA 6.5-PT	19		
M16直式孔型塑胶组装式插头-焊接式-尾管-24芯	M16-S24-PWA 5.0-PT	M16-S24-PWA 6.5-PT	24		
M16直式孔型塑胶组装式插头-焊接式-尾管-5芯A口	M16-S5A-PWA 5.0-PT	M16-S5A-PWA 6.5-PT	5A		
M16直式孔型塑胶组装式插头-焊接式-尾管-7芯A口	M16-S7A-PWA 5.0-PT	M16-S7A-PWA 6.5-PT	7A		
M16直式孔型塑胶组装式插头-焊接式-尾管-14芯A口	M16-S14A-PWA 5.0-PT	M16-S14A-PWA 6.5-PT	14A		

资料下载

产品目录	CAZN正成-欧标产品选型手册
认证/证书	EMC认证
RoHS报告	查看
防水测试报告	查看